

A Donaldson Company

A WORLD LEADER IN FUME EXTRACTION TECHNOLOGY

DentalPRO Universal

Last Updated on 02.02.2022





Stand-alone dust extraction system for CAD/CAM dental milling machines.

BOFA's DentalPRO Universal stand-alone dust extraction system filters small particulates generated during the CAD/ CAM milling of dental implants. The unit has a high-efficiency two-stage filtration process which helps the workplace maintain a clean working environment.

The unit's high vacuum pump is brushless and designed for continuous running for long periods of time before requiring servicing. The bag filter has a large 18-litre capacity and the HEPA filter is very high efficiency.

Technology



HEPA filter



ProTECT service plan



SureCHECK quality standard

Key features of the DentalPRO Universal

Digital speed control - for variable airflow rates

Standard

High vacuum pump for effective capture from source

Standard

Filters with long life and low replacement cost

Standard

HEPA filtration

Standard

Quiet in operation

Standard

24V remote stop / start interface + override

Optional

Auto sensing voltage (90-257v) for global use

Standard

Brushless motor (for longer periods of time before servicing)

Standard

High efficiency 5 layer large capacity easy change filter

Standard

Filter full indicator

Standard

Small footprint

Standard

Filter signal

Optional



https://bofainternational.com/en/portal/datasheets/dentalpro-universal/



Technical specification

- 1. Unit / filter condition display
- 5. Castors
- 9. Motor cooling inlet
- 2. On / off switch
- 6. Door hinge
- 10. Door latch
- 3. Override switch (optional)
- **7.** Hose inlet connection 50mm
- **11.** Optional interface connection
- 4. Power inlet
- 8. Exhaust outlet














Airflow through filter



Pre-filter



HEPA filter




Clean air



Contaminated air



Particulate

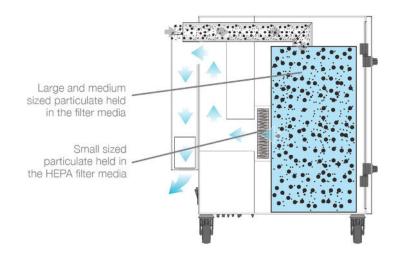

| Technical data | | |
|------------------------|---|---|
| | EU | US |
| Dimensions (HxWxD) | 590 x 460 x 535 mm | 23.23 x 18.11 x 21.06" |
| Cabinet construction | Powder coated mild steel | Powder coated mild steel |
| Max airflow / pressure | 285m³/hr / 96mbar | 167cfm / 96mbar |
| Electrical data | 115 - 230v Single-phase 1~ 50/60Hz Full load current: 12.5 amps / 1.1kw | 115 - 230v Single-phase 1~ 50/60Hz Full load current: 12.5 amps / 1.1kw |
| Noise level | < 66dBA (at typical operating speed) | < 66dBA (at typical operating speed) |
| Weight | 33kgs | 72.8lbs |

| Technical data | | |
|----------------|-------------|-------------|
| Approvals | UKCA and CE | UKCA and CE |

| Pre-filter bag specifications | |
|-------------------------------|-------------------|
| Filter media | Borosilicate |
| Filter media construction | Bag filter |
| Filter capacity | 18 Litres |
| Filter efficiency | 99% @ 0.3 microns |

| HEPA filter specifications | |
|----------------------------|--|
| HEPA filter media | Borosilicate |
| HEPA media construction | Maxi pleat construction with glue bead spacers |
| Filter efficiency | 99.997% @ 0.3 microns |

| Unit part numbers | | | | |
|---------------------|----------|-------------|--------------|----------------------|
| Model | Voltage | Part no. | Stop / start | Filter change signal |
| DentalPRO Universal | 100-230v | DL0844A0000 | A2001 | A2002 |

| Replacement filter part numbers | | |
|---------------------------------|------------|-------------|
| Model | Pre-filter | HEPA filter |
| DentalPRO Universal | A1030382 | A1030383 |

| Hose kits | |
|---------------------------|-------------|
| Description | Part number |
| 4m x 50mm flex with cuffs | A1020115 |

Datasheet correct at time of publishing.

Where applicable, the carbon used in BOFA units is capable of removing a wide range of VOCs, however it is the responsibility of the user to ensure the carbon is suitable for their application. For specific applications, please contact us for details.

Important Notice: Many factors beyond the control of BOFA can affect the use and performance of BOFA products in a particular application, including the conditions under which the product is used. Since these factors are uniquely within the user's knowledge and control, it is essential the user evaluate the products to determine whether the product is fit for the particular purpose and suitable for the user's application. All products, product specifications, availability and data are subject to change without notice, and may vary by region or country.

Think before you print! Please consider the environment before printing this document.

